


ARK XH Battery System





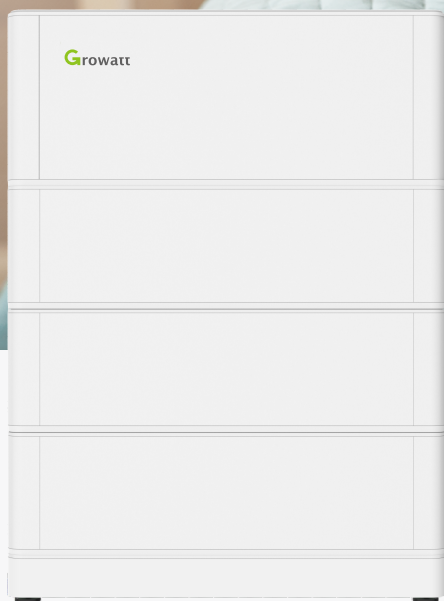

- Compatible with MIN-XH series inverter
- Flexible capacity options, 5.12kWh to 17.92kWh
- Excellent safety of cobalt free LiFePO4 battery
- Easy installation with modular and stacked design
- Long lifespan, 10 years warranty
- Remote firmware upgrade



P O W E R
- I N G O
T O M O -
R R O W O

Growatt
powering tomorrow

www.ginverter.com

Datasheet	ARK 5.1XH	ARK 7.6XH	ARK 10.2XH	ARK 12.8XH	ARK 15.3XH	ARK 17.9XH
System Demo						
Power module	BDC 95045-A1					
Number of power modules	1					
Battery Module	ARK 2.5H-A1 (2.56kWh, 51.2V, 28kg)					
Number of Modules in Series	2	3	4	5	6	7
Energy Capacity	5.12kWh	7.68kWh	10.24kWh	12.8kWh	15.36kWh	17.92kWh
Usable Capacity*1	5kWh	7.5kWh	10kWh	12.5kWh	15kWh	17.5kWh
Max. output power*2	2.5kW	3.75kW	5kW	6.25kW	7.5kW	8.75kW
Peak output power	5kW, 10s	7.5kW, 10s	10kW, 10s	12.5kW, 10s	15kW, 10s	17.5kW, 10s
Dimension (W/D/H)*3	650/260/630mm	650/260/815mm	650/260/1000mm	650/260/1185mm	650/260/1370mm	650/260/1555mm
Weight	71kg	99kg	127kg	155kg	183kg	211kg
Nominal voltage (single phase system)	360V	360V	360V	360V	380V	440V
Operating voltage range (single phase system)*4	360V-550V	360V-550V	360V-550V	360V-550V	380V-550V	440V-550V
Battery Type	Cobalt Free Lithium Iron Phosphate (LFP)					
IP Protection	IP65					
Installation	Wall-mounted or Floor installation*5					
Operation Temperature	-10°C ... -50°C*6					
Relative humidity	5%~95%					
Cooling	Natural					
Warranty	10 years					
Power Module	BDC 95045-A1					
Dimension(W/D/H)	650/260/260mm					
Weight	15kg					
Communication Port	CAN/RS485					
BAT voltage range	90V-400V					
Power module output voltage	360V-550V					
Maximum BAT current	25A					
Peak BAT current	50A					
Monitoring Parameters	SOC, System voltage, current, cell voltage, cell temperature, PCBA temperature					
Certification & Licensing	IEC 62619(Cell&Pack)/CE/CEC/RCM/UN38.3					

*1 Test conditions: 100% DoD, 0.5C charge and discharge at +25°C, useable capacity range 2.5kWh ±0.06kWh per module.

*2 Depend on the max. battery charge/discharge power of the inverter.

*3 Include power module (BDC 95045-A1)

*4 Single phase energy storage system supports 2~7pcs battery modules in series

*5 Floor installation requires extra base (W/D/H=650/260/80 mm)

*6 The performance will be limited when the temperature is below 10°C and above 45°C

*ARK series battery has an EU model and a General model, the storage inverters sold in European countries only work with EU model ARK battery.